


Load curves

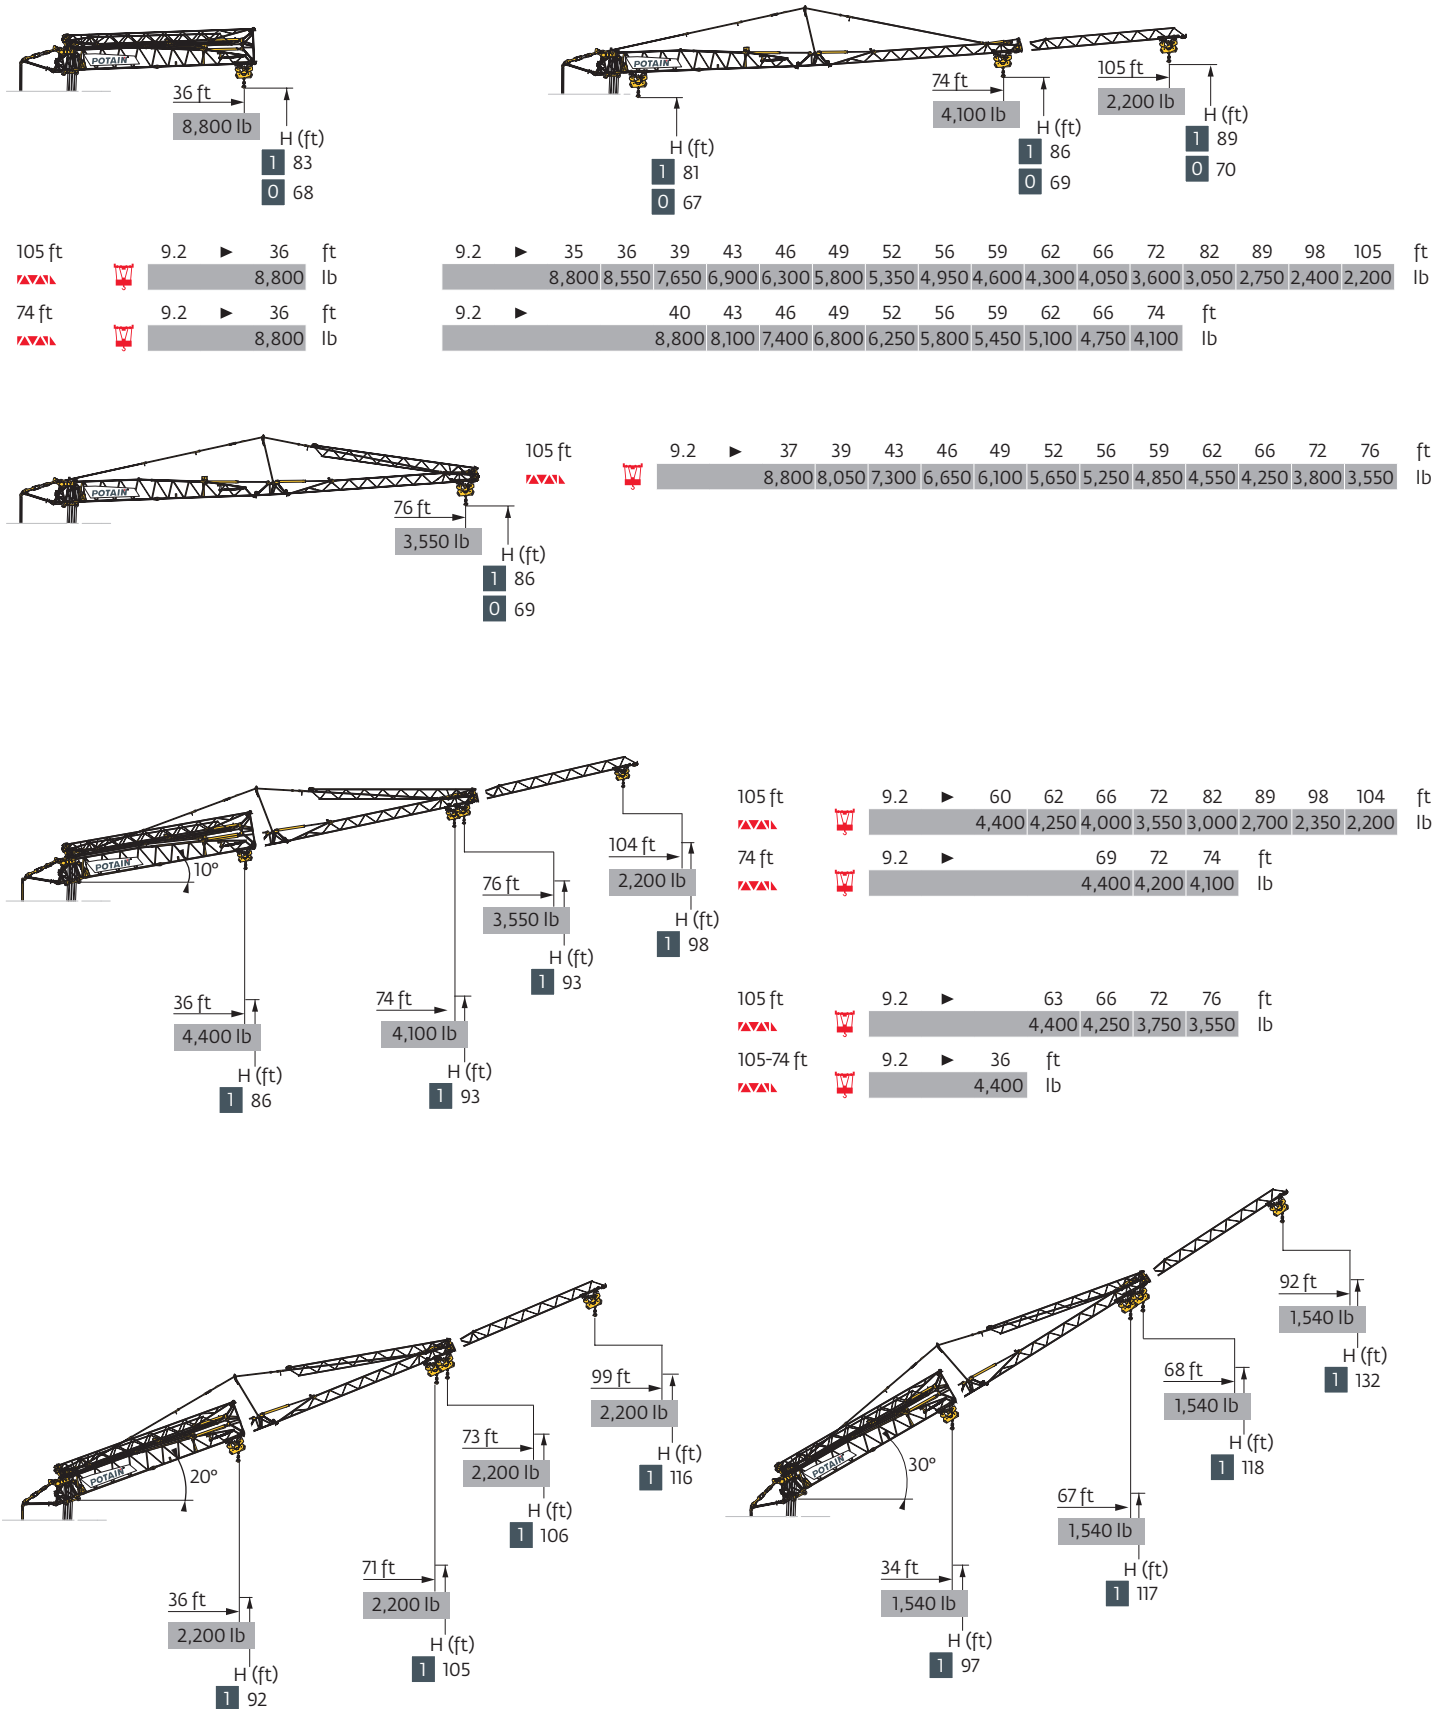


Mechanisms

480 V - 60 Hz								hp	kW
	18 HPL 10	fpm	6	62	118	190	213	18	13
		lb	8,800	8,800	4,400	2,200	1,100		
	3 DVF 5	fpm	3 → 148 (0 → 2,200 lb) 3 → 135 (2,200 lb → 8,800 lb)					3	2.2
	HPS 141	rpm	0 → 0.9					5	3.7


 IEC 60204-32		
480 V (+6% -10%) 60 Hz	19 → 13 kVA	

Erection

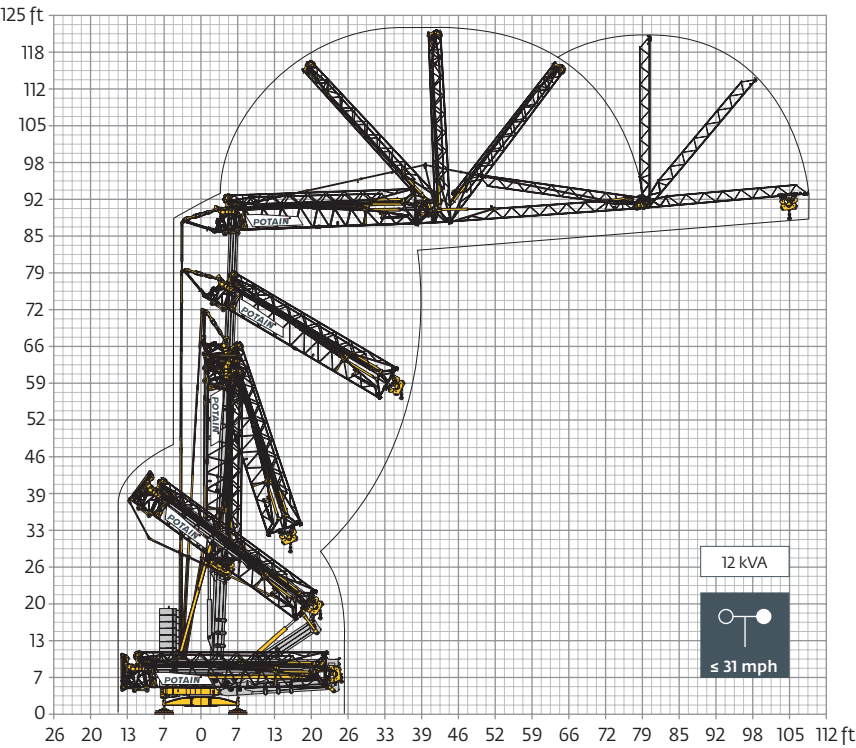


Transport


DS62/S120 - 6 mph

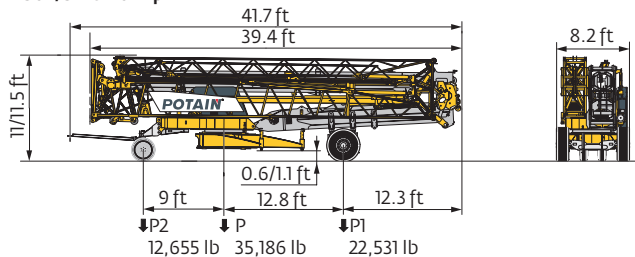


DJ105/S125 - 15.5 mph

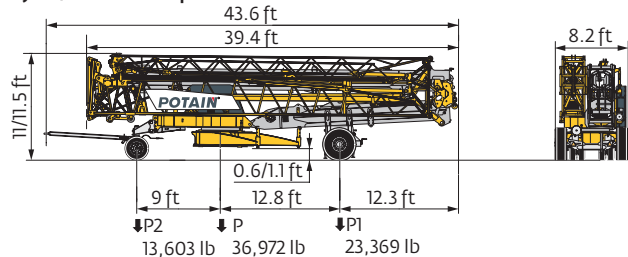


DJ126M/S125 - 15.5 mph

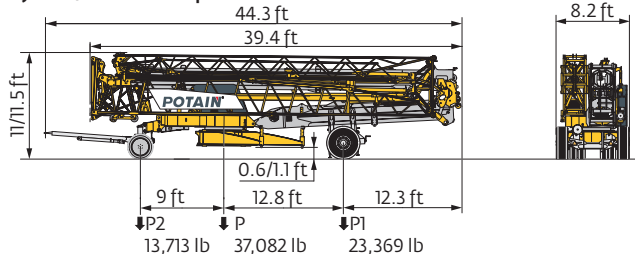

SL122/J215M - 50 mph

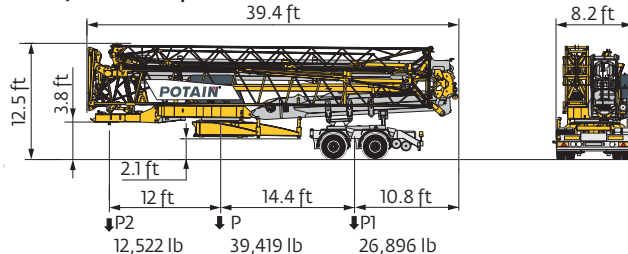

Container High Cube 40'



- R** Rear slewing radius
- i** Consult us
- Reactions in service
- Reactions out of service
- ▲** Weight without load, without ballast, without transport axles, with max. jib and standard height
- ▲** Total ballast weight

- Standard equipment
- Options
- Hoisting
- Trolleying
- Slewing
- kVA** Required power

- ⚡** Power Control Function: winch speeds adapted to the available power

⚠ This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.



Americas
Manitowoc, Wisconsin, USA
Tel: +1 920 684 6621
Fax: +1 920 683 6277

Shady Grove, Pennsylvania, USA
Tel: +1 717 597 8121
Fax: +1 717 597 4062

Europe, Middle East, Africa
Dardilly, France
Tel: +33 (0)4 72 18 20 20
Fax: +33 (0)4 72 18 20 00

China
Shanghai, China
Tel: +86 21 6457 0066
Fax: +86 21 6457 4955

Greater Asia-Pacific
Singapore
Tel: +65 6264 1188
Fax: +65 6862 4040

www.manitowoccranes.com

©2016 All Rights Reserved – Manitowoc Cranes, LLC and its affiliates.

Ref. 02D_ASCE_Hup32-27_2016_01-1