



158 ft	10.2	▶	43.8	46	53	59	66	72	79	85	92	98	105	112	118	125	131	138	144	151	157.5	ft
			13,250	12,450	10,550	9,150	8,050	7,150	6,400	5,800	5,300	4,850	4,500	4,150	3,850	3,600	3,400	3,150	3,000	2,800	2,650	lb
148 ft	10.2	▶		49.2	53	59	66	72	79	85	92	98	105	112	118	125	131	138	144	147.6		ft
				13,250	12,200	10,500	9,200	8,150	7,300	6,600	6,000	5,500	5,100	4,700	4,400	4,100	3,850	3,600	3,400	3,300		lb
131 ft	10.2	▶		52	53	59	66	72	79	85	92	98	105	112	118	125	131					ft
				13,250	13,050	11,350	10,000	8,900	8,000	7,300	6,650	6,150	5,650	5,250	4,900	4,600	4,300					lb
111 ft	10.2	▶			56.9	59	66	72	79	85	92	98	105	110.9								ft
					13,250	12,650	11,150	9,950	8,950	8,150	7,450	6,850	6,350	5,950								lb
104 ft	10.2	▶			58.1	59	66	72	79	85	92	98	104									ft
					13,250	13,000	11,450	10,200	9,200	8,400	7,650	7,050	6,600									lb
158 ft	10.2	▶		49.4	53	59	66	72	79	85	92	98	105									ft
				13,250	12,250	10,650	9,350	8,350	7,500	6,800	6,250	5,750	5,300									lb
148 ft	10.2	▶		50.9	53	59	66	72	79	85	92	98	105									ft
				13,250	12,750	11,050	9,750	8,700	7,800	7,100	6,500	5,950	5,500									lb
131 ft	10.2	▶		52.5	53	59	66	72	79	85	92	98	105									ft
				13,250	13,200	11,450	10,100	9,000	8,100	7,350	6,750	6,200	5,750									lb

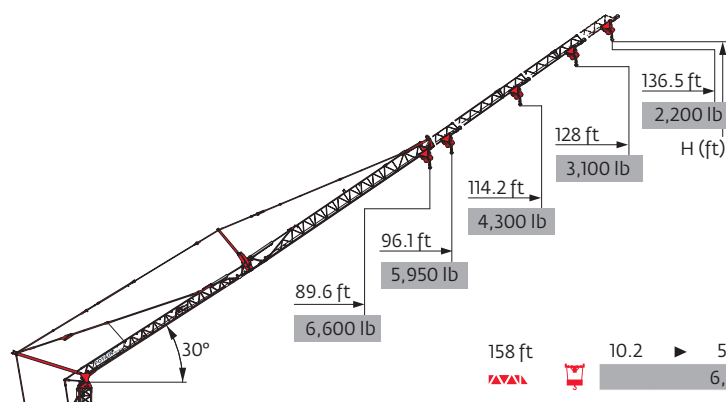

		158 ft	148 ft	131 ft	111 ft	104 ft
H (ft)	H+2	185.4	180.4	172.2	-	-
		175.5	170.6	162.4	-	-
	H+1	165.7	160.8	152.6	142.4	138.5
		155.8	150.9	142.7	132.5	128.6
	H+0	146	141.1	132.9	122.7	118.8
		-	-	-	-	-

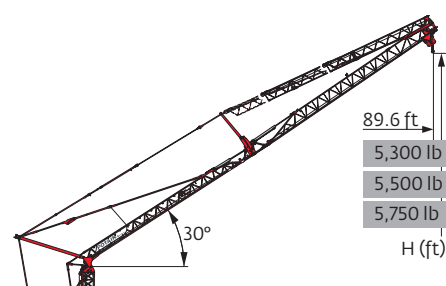

158 ft	10.2	▶	58.5	66	72	79	85	92	98	105	112	118	125	131	136.5	ft
			6,600	5,700	5,100	4,550	4,100	3,750	3,400	3,150	2,900	2,700	2,500	2,350	2,200	lb
148 ft	10.2	▶		69.6	72	79	85	92	98	105	112	118	125	128		ft
				6,600	6,350	5,700	5,150	4,700	4,300	4,000	3,700	3,400	3,200	3,100		lb
131 ft	10.2	▶				80.2	85	92	98	105	114.2					ft
						6,600	6,150	5,600	5,150	4,750	4,300					lb
111 ft	10.2	▶					88.6	92	96.1							ft
							6,600	6,300	5,950							lb
104 ft	10.2	▶					89.6									ft
							6,600									lb

158 ft	10.2	▶		74.6	79	85	89.6	ft
				6,600	6,200	5,600	5,300	lb
148 ft	10.2	▶		77.1	79	85	89.6	ft
				6,600	6,450	5,850	5,500	lb
131 ft	10.2	▶			79.6	85	89.6	ft
					6,600	6,100	5,750	lb

		158 ft	148 ft	131 ft
H (ft)	H+1	138.5		
		128.6		
	H+0	118.8		
		-		



		158 ft	148 ft	131 ft
H (ft)	H+1	138.5		
		128.6		
	H+0	118.8		
		-		

Mechanisms


480 V - 60 Hz								hp	kW
	25 HPL™ 15	fpm	7	52	98	151	230	25	19
		lb	13,250	13,250	6,600	3,300	880		
	5 DVF 5 Optima	fpm	48	128	180	230		5.5	4
		lb	13,250	13,250	4,400	440			
	HPS 152	rpm	0 → 0.8					2 x 5.5	2 x 4

 IEC 60204-32	 kVA	
480 V (+6% -10%) 60 Hz	 29 → 21 kVA	
	 34 → 24 kVA	


Erection

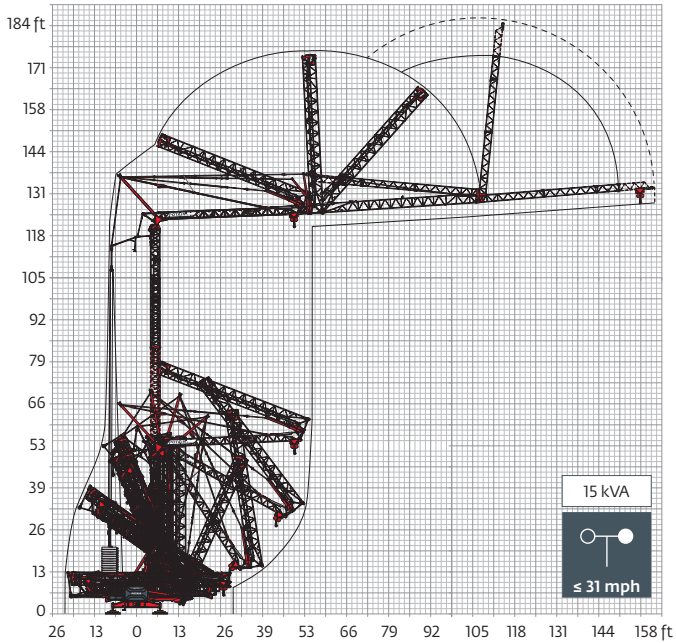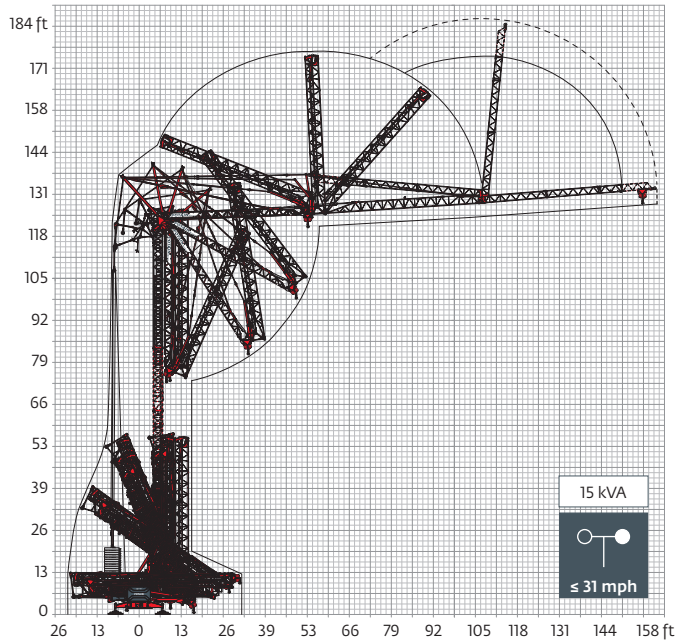

Transport

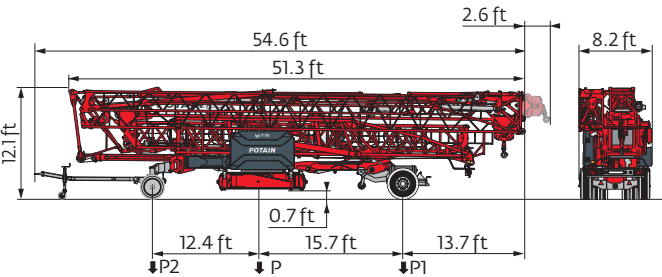

	mph	P (lb)	P1 (lb)	P2 (lb)
DJ126M/S125	15.5	50,670	26,450	24,220

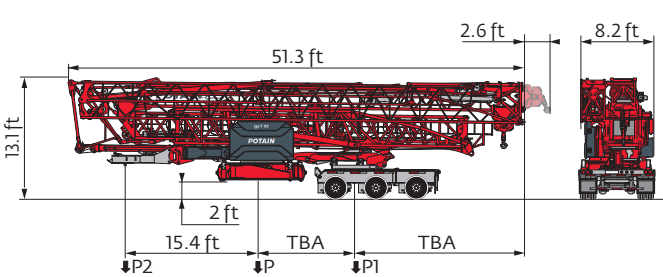

	mph	P (lb)	P1 (lb)	P2 (lb)
North America Highway Axle	31	i	i	i

- R

Rear slewing radius

●

Reactions in service

■

Reactions out of service

⚖

Weight without load, without ballast, without transport axles, with max. jib and standard height

⚖

Total ballast weight
- Standard equipment

⬜

Options

i

Consult us
- ⬆

Hoisting

⬆

Trolleying

⬆

Slewing

KVA

Required power

⌚

Power Control Function: winch speeds adapted to the available power

⚠

Hook heights given with plated pulley block

⚠

This commercial document is not legally binding

For any technical information, please refer to the corresponding instructions

